



DRILL (9/32" or "K") SCREW  
PILOT HOLES IN RAIL AS  
REQUIRED. USE HOLES IN  
LOAD BAR AS TEMPLATE  
FOR HOLE LOCATION.

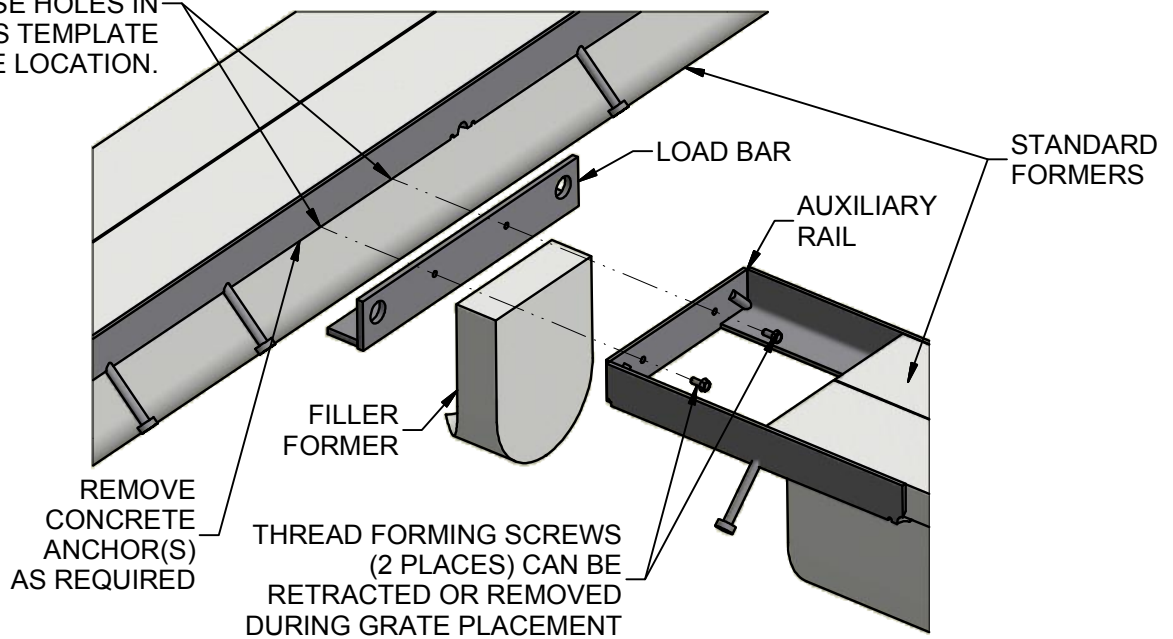

## EXPLODED VIEW

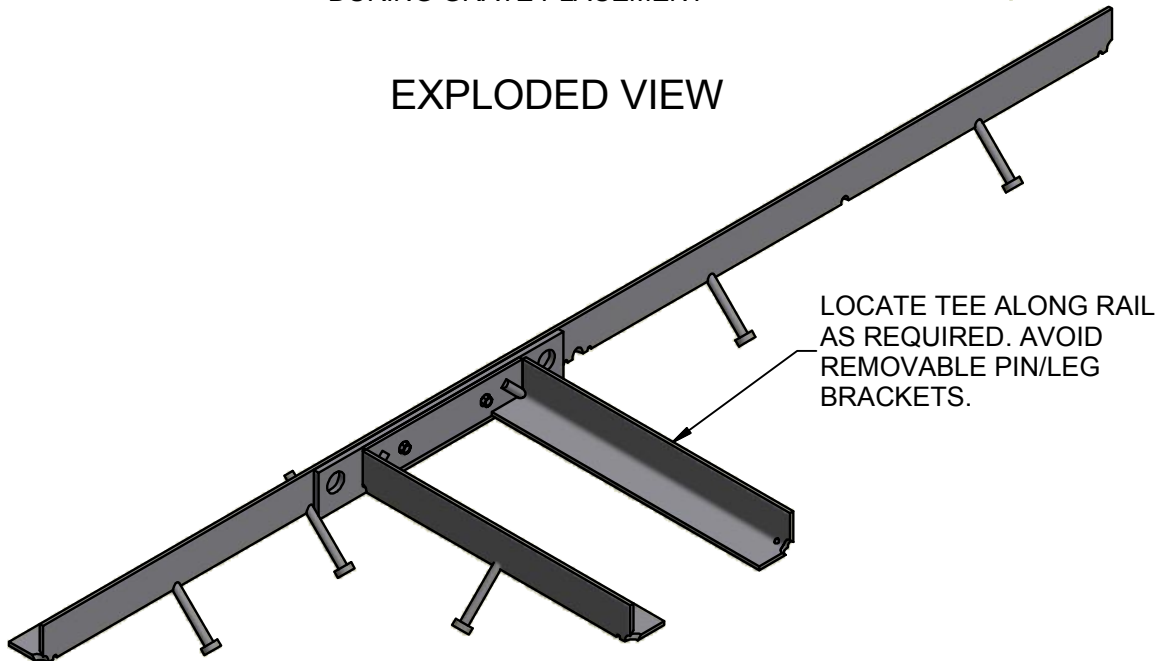

## ASSEMBLED VIEW (FORMERS REMOVED)

**ABT<sup>®</sup>, INC.**

P.O. BOX 837 / 259 MURDOCK ROAD  
TROUTMAN, NC 28166  
(704) 528-9806 (800) 438-6057  
www.abtdrains.com

### FABRICATION DRAWING © 2007 ABT, Inc. TRENCH FORMER DETAIL 1803 - PIN LOCK AUXILIARY RAIL - TEE

FILE: DET-PL-TEE-01

PART: DET-PL-TEE

Proprietary rights of ABT, Inc. are included in the information disclosed herein. The recipient, by accepting this document, agrees that neither this document nor the information disclosed herein nor any part thereof shall be copied, reproduced or transferred to others for manufacturing or for any other purpose except as specifically authorized in writing by ABT, Inc.

**DISCLAIMER:** The customer and the customer's architects, engineers, consultants and other professionals are completely responsible for the selection, installation, and maintenance of any product purchased from ABT, and EXCEPT AS EXPRESSLY PROVIDED IN ABT'S STANDARD WARRANTIES, ABT MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR THE CUSTOMER'S APPLICATION. Copies of ABT's standard warranties are available upon request.