


Plan Notes

- 1. Series Number: TS12-12.501G.FB-F21E
- 2 Grates:
 - Ductile Iron per ASTM A536-84 (Uncoated)
 - Open Area: Not Applicable
 - Load Rating: 2496 PSI (AASHTO M-306 Test Method)
 - Made in the USA
- 2. Form Release: Non-Petroleum Based
- 3. Concrete: Concrete Thickness and Reinforcement per Structural Engineer's Specification for the Application.



Copyright © 2010 ABT, Inc.

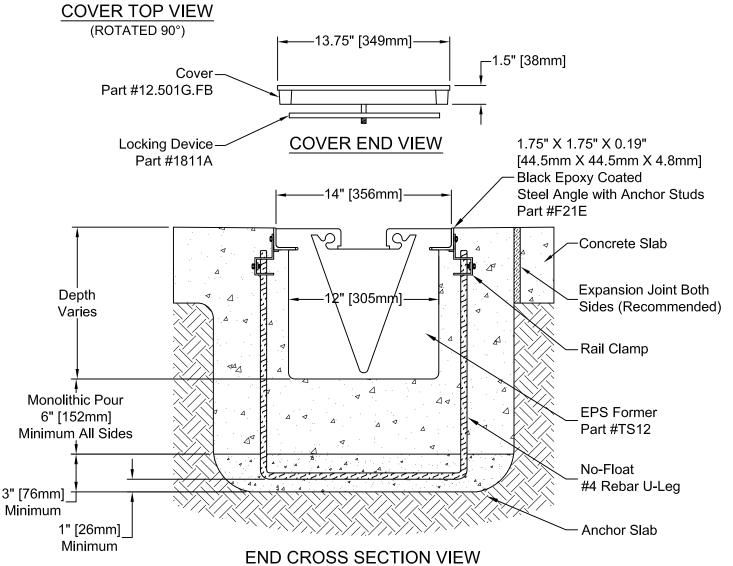

(704) 528-9806

TFX 12 - 12" [305mm] Trench Former® System with Solid Cover

SERIES:

TS12-12.501G.FB-F21E

rev: **00**

Proprietary rights of ABT, Inc. are included in the information disclosed herein. The recipient, by accepting this document, agrees that neither this document nor the information disclosed herein nor any part thereof shall be copied, reproduced or transferred to others for manufacturing or for any other purpose except as specifically authorized in writing by ABT, Inc.

<u>DISCLAIMER</u>: The customer and the customer's architects, engineers, consultants and other professionals are completely responsible for the selection, installation, and maintenance of any product purchased from ABT, and EXCEPT AS EXPRESSLY PROVIDED IN ABT'S STANDARD WARRANTIES, ABT MAKES NO WARRANTY, EXPRESS OR IMPLIED, AS TO THE SUITABILITY, DESIGN, MERCHANTABILITY, OR FITNESS OF THE PRODUCT FOR CUSTOMER'S APPLICATION. Copies of ABT's standard warranties are available upon request.